
Project #: 221298

Start Date: **Spring 2022**
Completion Date: **Winter 2023**
Status: **Completed**

Asphalt Resurfacing Highway 1 Surrey Area (110.4 LANE KM)

Contract Value: $16,735,665.65

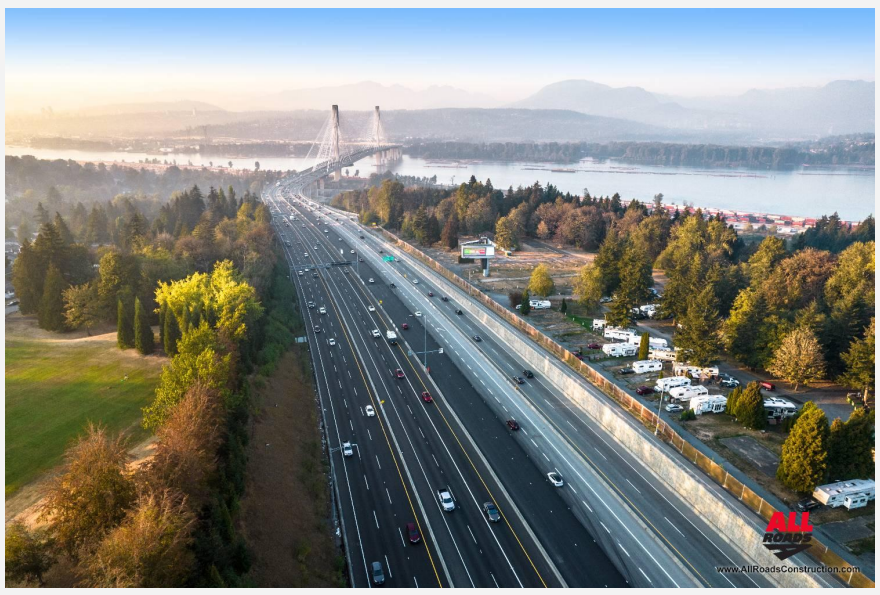

Project Highlights:

- 80,482 Metric Tonnes of Asphalt Paving
- 171,295m2 of Full/Variable Depth Asphalt Milling
- 4038 MT of OGFC
- 24,506 LM of Concrete Barrier Removal & Replacement
- 9 Crash Attenuators
- Extensive Quality Assurance
- Full GPS LPS Milling, Paving & PaveLink
- Extensive Traffic Management & Control

Description:

GPS, LPS & PaveLink Set-up for Scanning, Design and Real time tracking including load times, truck travel routes, asphalt usage, mat temperature, rolling pattens and densities.

Team Members:

• Rod Stephens - Project Director
• Denis Labelle - Construction Manager
• Amir Mostafavi - Project Manager
• Max Spedding - General Paving Superintendent
• James Klement –Superintendent

Client Information:

Ministry of Transportation and Infrastructure
Vincent Ong - Project Manager
T: 236-862-0601

Project Supervisor Information:

Ministry of Transportation and Infrastructure
Renato Suarez - Ministry Representative - Paving
T: 778-621-2030, **E**: Renato.Suarez@gov.bc.ca

Project Engineers:

Project Associates:

• Kontur Geotechnical
• Eagle West Truck & Crane

